

# RUT950

INDUSTRIAL CELLULAR ROUTER



RUT950 360° VIEW



## CONNECTIVITY

4G/LTE (Cat 4), 3G, 2G

## WIFI

Wireless Access Point with Hotspot functionality

## ETHERNET

4x Ethernet ports with VLAN functionality

## WAN FAILOVER

Automatic switch to available backup connection

## DUAL SIM

With auto failover, backup WAN and other switching scenarios

## RMS

Compatible with Teltonika Remote Management System

### RUT950

## PRODUCT DESCRIPTION

// RUT950 is a high-performance industrial 4G LTE Wi-Fi router designed as a Main/Backup internet source and guarantees a reliable internet connection with high data throughput and data redundancy.


// Compatible with the Teltonika Networks Remote Management System (RMS) for easy and secure monitoring.

// It has four Ethernet ports, two external SIM holders, digital I/O, and signal strength status LED indicators.


// Powered by RutOS - a unified operating system for all Teltonika Networks routers, this device is highly secure and customizable.



### FRONT VIEW

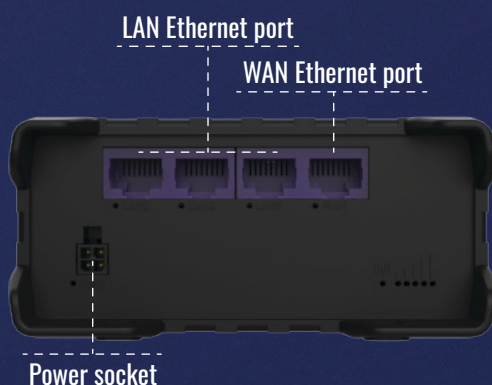

### BACK VIEW

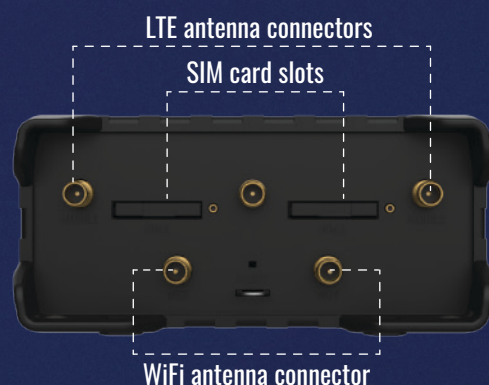

# KEY FEATURES

## HARDWARE

Mobile	4G/LTE (Cat 4), 3G, 2G
CPU	Atheros, MIPS 74Kc, 550 MHz
Memory	16 MBytes Flash, 128 MBytes RAM
Powering option	4pin power socket, 9-30 VDC
SIM	2 x External SIM holders (2FF)
Antenna connectors	2 x SMA for mobile, 2 x RP-SMA for WiFi
Ethernet	4 x 10/100 Ethernet ports: 1 x WAN (configurable as LAN), 3 x LAN
WiFi	IEEE 802.11b/g/n, Access point (AP), Station (STA)
Inputs/Outputs	On 4pin socket: 1 x Digital input, 1 x Digital open collector output
Status LEDs	1 x Bi-Color connection type, 5 x Signal strength, 4 x Ethernet, 1 x Power
Operating temperature	-40 °C to 75 °C
Housing	Aluminium housing with DIN rail mounting option, plastic panels with flat mounting option
Dimensions (W x H x D)	109 x 50 x 103 mm
Weight	263 g

## SOFTWARE

Operating system	RutOS (OpenWrt based Linux OS)
Mobile features	Auto APN, Band lock, SIM switch, Operator black/white list, Data/SMS limits
Network	Failover (Network backup), VLAN, QoS, Load Balancing
Routing	Static routes, Dynamic routes (BGP, OSPFv2, RIPv1/v2, NHRP), Routing rules
VPN and tunneling	OpenVPN, IPsec, GRE, PPTP, L2TP, Stunnel, DMVPN, SSTP
Monitoring and management	WEB UI, CLI, SSH, SMS, TR-069, SNMP, JSON-RPC, MQTT, RMS
Connection monitoring	Ping Reboot, Wget reboot, Periodic Reboot, LCP and ICMP for link inspection
Cloud solutions	RMS, FOTA, Telenor, Azure IoT Hub, Cloud of Things, Cumulocity, ThingWorx
Hotspot	External/Internal Radius, SMS OTP, MAC authentication, Walled Garden
Supported Hotspot platforms	IronWiFi, HotspotSystem, Cloud4Wi, SAI + WiFi, MugiCloud, Purple.ai
SMS features	SMS status, SMS configuration, Send/Read SMS via HTTP POST/GET, EMAIL to SMS, SMS to Email, SMS to HTTP, SMS to SMS, scheduled SMS, SMS autoreply, SMPP
Services	DDNS, VRRP, Wake On Lan (WOL), WEB filter, UPNP, Traffic Logging

## RMS

**RMS** | REMOTE MANAGEMENT SYSTEM  
**COMPATIBLE WITH RUT950**  
 MANAGEMENT | ALERTS | CONFIGURATION | ACCESS | FOTA



## SOCIAL

